


# SIGN SPECIFICATION - FOR RCO PROJECTS


1. THE SIGN MUST BE CONSTRUCTED OF 1200x2400mm (4'x8') 12mm (ONE HALF INCH), GRADE A-C, EXTERIOR TYPE PLYWOOD MOUNTED ON A FRAME OF TREATED LUMBER.
2. PAINT COLORS  
 PAINT THE FRONT FACE AND EDGES OF SIGN WITH ONE COAT EXTERIOR PRIMER AND TWO COATS OF RED COLOR ALKYD GLOSS ENAMEL PAINT. FEDERAL STANDARD 595a  
 USE BLACK COLOR ALKYD GLOSS ENAMEL PAINT, FEDERAL STANDARD 595a FOR SIGN LETTERING.
3. ALL LETTERING SHALL BE UPPER CASE HELVETICA MEDIUM.
4. PAINT ALL OTHER WOOD SURFACES WITH ONE COAT EXTERIOR PRIMER MIL SPEC P-28582 AND TWO COATS GLOSSY WHITE ENAMEL PAINT, FEDERAL SPEC TT-E-489.
5. PRESERVATIVE TREAT ALL WOOD SURFACES BURIED OR IN CONTACT WITH THE EARTH.
6. ALL FASTENERS SHALL BE GALVANIZED COATED.
7. LUMBER SHALL BE NON STRESS GRADE:  $F_t = 8.5^5 \text{ KGS/M}^2$  (1200PSI)  
 $F_t = 10.5^5 \text{ KGS/M}^2$  (1500PSI)

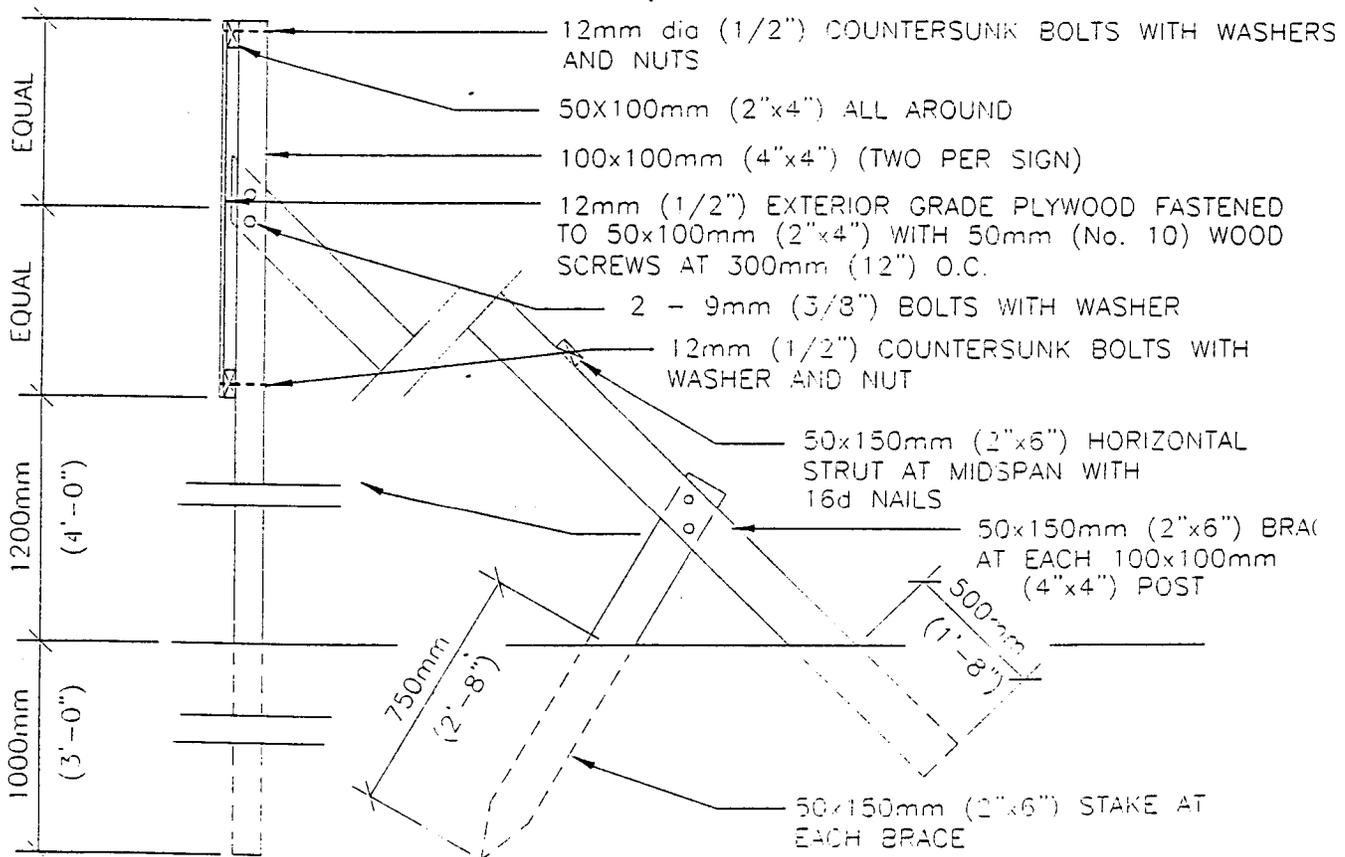

## TYPICAL CROSS SECTION

SCALE: NONE

PLATE 1 OF 2

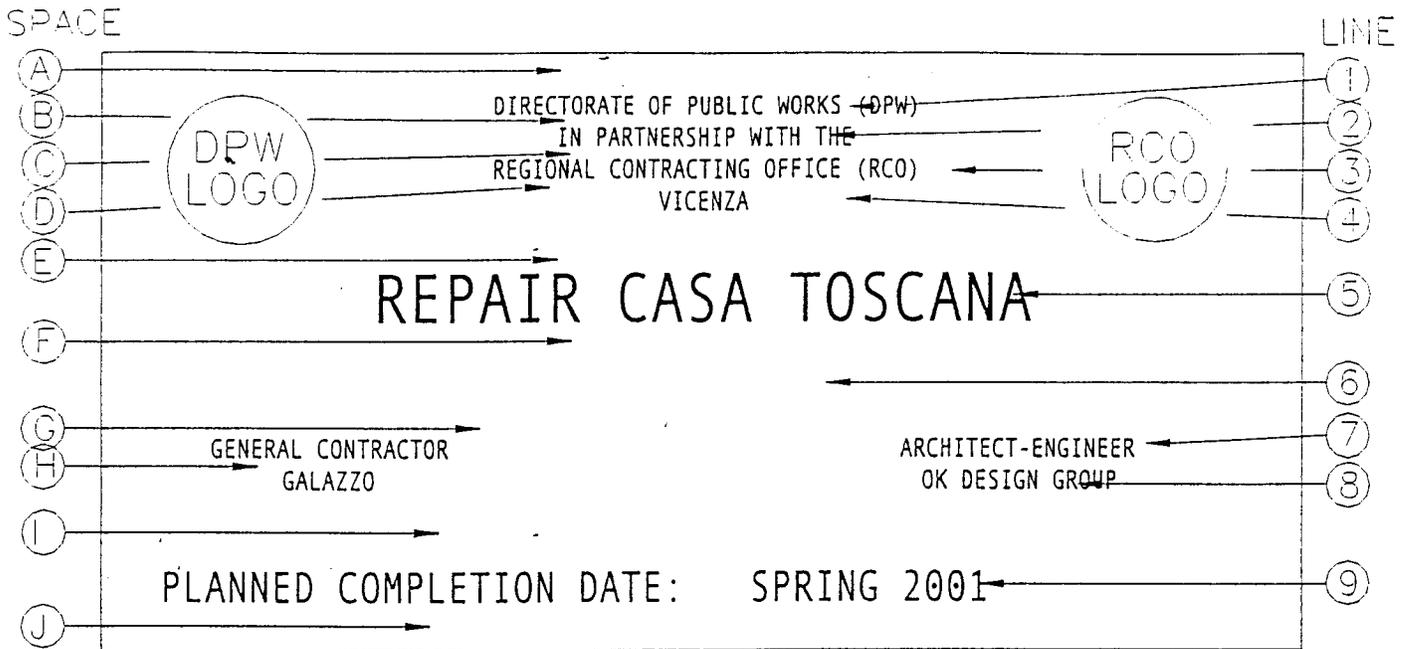

## SAMPLE CONSTRUCTION SIGN FOR PROJECTS SCHEDULE

SPACE	HEIGHT	LINE	DESCRIPTION	LETTER HEIGHT	STROKE
A	3.5"	1	DPW	1.5"	3/16"
B	1"	2	IN PARTNERSHIP WITH THE	1.5"	3/16"
C	1"	3	RCO	1.5"	3/16"
D	1"	4	VICENZA	1.5"	3/16"
E	5"	5	ACTIVITY NAME*	4"	1/2"
F	3"	6	PROJECT NAME*	4"	1/2"
		7	PROJECT NAME CONT'D*		
		8	(IF REQUIRED)		
G	5"	9	GENERAL CONTRACTOR/A-E	1.5"	3/16"
H	1"		GENERAL CONTRACTOR/A-E*	1.5"	3/16"
I	4"		ARCHITECT-ENGINEER	2.5"	1/4"
J	4"		OK DESIGN GROUP		

\*—WILL VARY TO SUIT  
PROJECT REQUIREMENTS

## SAMPLE CONSTRUCTION SIGN FOR

SCALE: NONE RCO PROJECTS